

LIGHTING TECHNOLOGY AT WORK

P
R
O
D
U
C
T

R
A
N
G
E



MANUFACTURERS OF

FLOODLIGHTS, OUTDOOR FITTINGS, INDUSTRIAL LUMINAIRES
AND IP65 FLUORESCENTS



REEFLITE

HEAD OFFICE

REEFLITE

36 Fransen Street, Chamdor, Krugersdorp
PO Box 1330, Krugersdorp 1740
Tel: (011) 769-1574 (5 lines) ■ Fax: (011) 769-1576
email: info@reeflite.com ■ website: www.reeflite.com

CAPE TOWN BRANCH

REEFLITE

Unit 10, Section 6, Kleinbabylonstoren, 20 Harris Drive, Ottery
PO Box 185, Ottery 7808
Tel: (021) 703-0060 / 1 ■ Fax: (021) 703-0062
Email: chrissr@reeflite.com ■ Website: www.reeflite.com

NATAL BRANCH

REEFLITE

Unit 3, Pylon Park, 2 Hillclimb Road, Westmead, Pinetown
PO Box 15034, Westmead 3608
Tel: (031) 700-8300 / 700-9337 ■ Fax: (031) 700-1332
Email: vinesh@reeflite.com ■ Website: www.reeflite.com

PORT ELIZABETH AGENT

GPA TRADING

38A Green Street, North End, Port Elizabeth
PO Box 27549, Port Elizabeth 6057
Tel: (041) 484-3132 ■ Fax: (041) 484-3131
Email: matt@gpagencies.co.za

BLOEMFONTEIN AGENT

VAN DEN BLINK & SONS



98 Charles Street, Bloemfontein
PO Box 28930, Danhof 9310
Tel: (051) 447-0052 ■ Fax: (051) 447-0052
Email: c.vandenblink@osram.co.za

RL737 FLOODLIGHT	1
RL737 226 FLOODLIGHT	1
RL707 FLOODLIGHT	2
RL717 FLOODLIGHT	2
RL303 CFL FLOODLIGHT	3
RL303 FLOODLIGHT	3
RL101 FLOODLIGHT	4
RL1000 FLOODLIGHT	4
RL045 ENERGY SAVING FLOODLIGHT	5
EF ENERGY SAVING FLOODLIGHT	5
CF1000/2000 FLOODLIGHT	6
CF FLOODLIGHT	6
RL254 E ECONOBAY	7
RL254 S SUPERBAY	7
CH ECONOBAY	8
CH SUPERBAY	8
RL254 E/S ENERGY SAVING HIGHBAY	9
RL606 LOWBAY	9
RL808 POST TOP	10
RFM FLUORESCENT MOISTURE PROOF	10
CDB BULKHEAD	11
CIB INDUSTRIAL BULKHEAD	11
ECONO BULKHEAD	12
RECTANGULAR BULKHEAD	12
ROUND BULKHEAD	13
SQUARE BULKHEAD	13
LUNA BULKHEAD	14
UFO BULKHEAD	14
BOLLARD	15
ECONO BRAAI-LITE	15
OUTDOOR LITE & FOLDING BRAAI-LITE	16
HANDI-LITE	16
ELECTRICAL ACCESSORIES	17
LUMINOUS FLUX OF DISCHARGE LAMPS	19
CORRECTED LINE CURRENT	20

Details and specifications of the products in this catalogue were accurate at the time of publication

RL737 FLOODLIGHT

70(I) HPS ■ 80 MV ■ 125 MV



APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
SMALL HOLDINGS
PARKS AND GARDENS

MOUNTING HEIGHT: 2 - 5 m



- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- wall mount electroplated stirrup
- pole clamp available
- compact
- colours: white/black
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL737 70(I) HPS	0.72 A	0.45 A	3.44 KG
RL737 80 MV	0.90 A	0.45 A	2.74 KG
RL737 125 MV	1.35 A	0.68 A	3.14 KG

RL737 226 FLOODLIGHT

2 x 26 W PL



APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
GARDENS

MOUNTING HEIGHT: 2 - 4 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- wall mount electroplated stirrup
- pole clamp available
- compact
- colours: white/black
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL737 226	0.40 A	0.30 A	2.70 KG

RL707 FLOODLIGHT

70(I) HPS ■ 70 HPS ■ 80 MV ■ 125 MV



APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
SMALL HOLDINGS
PARKS AND GARDENS
MOUNTING HEIGHT: 2 - 5 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- universal electroplated mounting stirrup with pole clamp
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL707 70(I) HPS	0.72 A	0.45 A	6.40 KG
RL707 70 HPS	0.72 A	0.45 A	6.40 KG
RL707 80 MV	0.90 A	0.45 A	5.90 KG
RL707 125 MV	1.35 A	0.68 A	6.30 KG

RL717 FLOODLIGHT

150 HPS ■ 150 MH



APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
SMALL HOLDINGS
PARKS AND GARDENS
MOUNTING HEIGHT: 3 - 6 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- universal electroplated mounting stirrup with pole clamp
- IP55
- available with medium or wide beam reflectors

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL717 150 HPS	1.30 A	0.88 A	7.25 KG
RL717 150 MH	1.70 A	0.82 A	7.20 KG

RL303 CFL FLOODLIGHT

85 CFL ■ 105 CFL

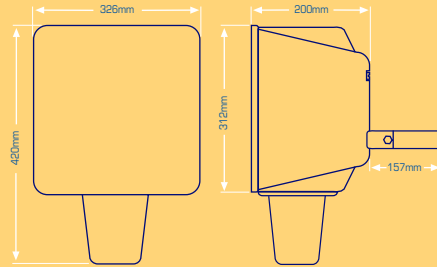

APPLICATIONS

- SECURITY
- SIGNAGE
- WORK AREAS
- ILLUMINATION OF BUILDINGS
- MOUNTING HEIGHT: 3 - 5 m**


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- universal electroplated galvanised mounting stirrup with pole clamp
- IP55
- colours: white/black

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL303 CFL 85 W	0.6 A	0.38 A	3.5 KG
RL303 CFL 105 W	0.9 A	0.44 A	3.5 KG

RL303 FLOODLIGHT

250 MV ■ 400 MV



APPLICATIONS

- SECURITY
- SIGNAGE
- WORK AREAS
- ILLUMINATION OF BUILDINGS
- MOUNTING HEIGHT: 4 - 7 m**


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- external control gear compartment
- high purity aluminium reflector
- universal electroplated galvanised mounting stirrup with pole clamp
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL303 250 MV	2.60 A	1.35 A	8.44 KG
RL303 400 MV	4.20 A	2.10 A	9.74 KG

RL101 FLOODLIGHT

250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

- SECURITY
- SIGNAGE
- SPORTS FIELDS
- CAR PARKS
- WORK AREAS
- ILLUMINATION OF BUILDINGS
- HIGH MAST INSTALLATIONS
- MOUNTING HEIGHT: 7 - 30 m**


- corrosion resistant glass reinforced polyester housing ■ heat tempered glass ■ integral control gear
- high purity, high performance aluminium reflector ■ universal electroplated mounting stirrup with pole clamp
- optional high mast stirrup ■ IP55 ■ **available with narrow or wide beam reflectors**

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL101 250 HPS	2.10 A	1.42 A	11.75 KG
RL101 400 HPS	3.80 A	2.20 A	13.65 KG
RL101 250 MH	2.80 A	1.42 A	11.75 KG
RL101 400 MH	3.80 A	2.20 A	13.65 KG

RL1000 FLOODLIGHT

1000 HPS ■ 1000 MH

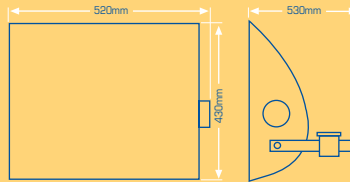

APPLICATIONS

- SECURITY
- SPORTS FIELDS
- CAR PARKS
- LARGE WORK AREAS
- DOCK, RAILWAY & CONTAINER YARDS
- HIGH MAST INSTALLATIONS
- MOUNTING HEIGHT: 12 - 40 m**


- corrosion resistant glass reinforced polyester housing ■ heat tempered glass ■ optional high mast stirrup
- external control gear compartment ■ high purity, high performance aluminium reflector ■ IP55
- universal electroplated mounting stirrup with pole clamp ■ **available with narrow or wide beam reflectors**

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL1000 1000 HPS	8.80 A	5.50 A	21.60 KG
RL1000 1000 MH	9.60 A	5.20 A	21.30 KG

RLO45 ENERGY SAVING FLOODLIGHT

13 - 45W E27

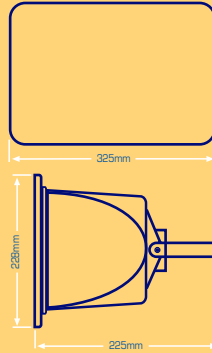

APPLICATIONS

- SECURITY
- PERIMETERS
- SIGNAGE
- GARDENS

MOUNTING HEIGHT: 2 - 3 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- universal electroplated mounting stirrup with pole clamp
- compact
- IP55
- colours: white/black

ORDERING DATA

CODE	WHITE FIBREGLASS FITTING	WEIGHT
	LAMPS	
RLO45 CFL	13W - 45W E27 ENERGY SAVING	2.00 KG

EF ENERGY SAVING FLOODLIGHT

2 X 9 W PL ■ 2 X 13 W PL ■ 2 X 18 W PL

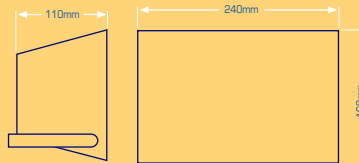

APPLICATIONS

- DOMESTIC
- SECURITY
- SMALL AREAS

MOUNTING HEIGHT: 2 - 3 M


- powder coated cast aluminium housing
- heat tempered glass
- integral control gear
- powder coated mild steel mounting stirrup
- IP55

ORDERING DATA

CODE	LAMP TYPE	RUNNING CURRENT	WEIGHT
EF 209	2 X 9 W PL	0.12 A	2.30 KG
EF 213	2 X 13 W PL	0.16 A	2.30 KG
EF 218	2 X 18 W PL	0.22 A	2.30 KG

CF 1000 / 2000 FLOODLIGHT

CF1000 HPS ■ CF1000 MH ■ CF2000 MH

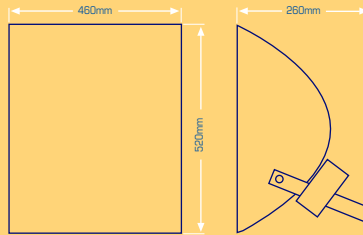

APPLICATIONS

- SECURITY
- SPORTS FIELDS
- CAR PARKS
- LARGE WORK AREAS
- DOCK, RAILWAY & CONTAINER YARDS
- HIGH MAST INSTALLATIONS
- MOUNTING HEIGHT: 12 - 30 m**


- robust powder coated cast aluminium housing
- heat tempered glass
- high performance aluminium reflector
- mild steel powder coated stirrup
- protractor for aiming angles
- external control gear compartment
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CF1000 HPS	8.80 A	5.50 A	30.70 KG
CF1000 MH	9.60 A	5.20 A	30.70 KG
CF2000 MH (8.8A) 350V	11.40 A	7.50 A	40.50 KG
CF2000 MH (10.3A) 360V	8.90 A	6.30 A	40.50 KG
CF2000 MH (16.5A) 230V	11.80 A	10.90 A	41.50 KG

CF FLOODLIGHT

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

- SECURITY
- SMALL SPORTS AREAS
- CAR PARKS
- WORK AREAS
- ILLUMINATION OF BUILDINGS
- MOUNTING HEIGHT: 5 - 9 m**


- powder coated cast aluminium housing
- heat tempered glass
- separate control gear compartment
- mild steel wall mount powder coated stirrup - optional pole clamp
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CF 250 MV	2.60 A	1.35 A	8.25 KG
CF 400 MV	4.20 A	2.10 A	10.30 KG
CF 250 HPS	2.10 A	1.42 A	8.90 KG
CF 400 HPS	3.80 A	2.20 A	10.55 KG
CF 250 MH	2.80 A	1.42 A	8.90 KG
CF 400 MH	3.80 A	2.20 A	10.55 KG

RL254 E ECONOBAY

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

WAREHOUSES
FOUNDRIES
FACTORIES
WORKSHOPS & OTHER
INDUSTRIAL INSTALLATIONS
MOUNTING HEIGHT: 8 M +


- powder coated mild steel gear housing ■ removable gear tray
- 420mm anodised aluminium reflector with optional glass cover ■ IP23 open ■ IP43 enclosed
- **also available with:** 16" acrylic diffuser with optional acrylic drop lens with aluminium adapter

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL254 E 250 MV	2.60 A	1.35 A	6.80 KG
RL254 E 400 MV	4.20 A	2.10 A	7.75 KG
RL254 E 250 HPS	2.10 A	1.42 A	8.00 KG
RL254 E 400 HPS	3.80 A	2.20 A	9.50 KG
RL254 E 250 MH	2.80 A	1.42 A	8.00 KG
RL254 E 400 MH	3.80 A	2.20 A	9.50 KG

RL254 S SUPERBAY

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

WAREHOUSES
FOUNDRIES
FACTORIES
WORKSHOPS & OTHER
INDUSTRIAL INSTALLATIONS
MOUNTING HEIGHT: 5 m +


- powder coated mild steel gear housing ■ removable gear tray
- 520mm anodised aluminium reflector with optional glass cover ■ IP23 open ■ IP43 enclosed
- **also available with:** 22" acrylic diffuser with optional acrylic drop lens with aluminium adapter

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL254 S 250 MV	2.60 A	1.35 A	7.30 KG
RL254 S 400 MV	4.20 A	2.10 A	8.30 KG
RL254 S 250 HPS	2.10 A	1.42 A	8.50 KG
RL254 S 400 HPS	3.80 A	2.20 A	9.85 KG
RL254 S 250 MH	2.80 A	1.42 A	8.50 KG
RL254 S 400 MH	3.80 A	2.20 A	9.85 KG

CH ECONOBAY

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

LARGE RETAIL STORES
WAREHOUSES
SHOPPING CENTRES
SHOWROOMS

MOUNTING HEIGHT: 5 m +


- powder coated cast aluminium housing ■ **optional acrylic drop lens with aluminium adaptor available**
- 16" acrylic diffuser ■ also available in 420mm diameter anodised aluminium reflector with optional glass cover
- control gear IP53 ■ reflector IP23

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CHEAC 250 MV	2.60 A	1.35 A	5.80 KG
CHEAC 400 MV	4.20 A	2.10 A	6.90 KG
CHEAC 250 HPS	2.10 A	1.42 A	7.00 KG
CHEAC 400 HPS	3.80 A	2.20 A	8.30 KG
CHEAC 250 MH	2.80 A	1.42 A	7.00 KG
CHEAC 400 MH	3.80 A	2.20 A	8.30 KG

CH SUPERBAY

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH



APPLICATIONS

LARGE RETAIL STORES
WAREHOUSES
SHOPPING CENTRES
SHOWROOMS

MOUNTING HEIGHT: 5 m +


- powder coated cast aluminium housing ■ **optional acrylic drop lens with aluminium adaptor available**
- 22" acrylic diffuser ■ also available in 520mm diameter anodised aluminium reflector with optional glass cover
- control gear IP53 ■ reflector IP23

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CHSAC 250 MV	2.60 A	1.35 A	5.90 KG
CHSAC 400 MV	4.20 A	2.10 A	7.00 KG
CHSAC 250 HPS	2.10 A	1.42 A	7.10 KG
CHSAC 400 HPS	3.80 A	2.20 A	8.40 KG
CHSAC 250 MH	2.80 A	1.42 A	7.10 KG
CHSAC 400 MH	3.80 A	2.20 A	8.40 KG

RL254 E/S ENERGY SAVING HIGHBAY

85 W ■ 105 W



APPLICATIONS

WAREHOUSES
 FOUNDRIES
 FACTORIES
 WORKSHOPS & OTHER INDUSTRIAL INSTALLATIONS
MOUNTING HEIGHT: 5 - 6 m


- corrosion resistant glass reinforced mounting cup
- 420/520mm anodised aluminium reflector with optional glass cover ■ IP23 open ■ IP43 enclosed
- 16"/22" acrylic diffuser with optional acrylic drop lens with aluminium adapter

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL254 E 85 CFL	0.6 A	0.38 A	1.56 KG
RL254 E 105 CFL	0.9 A	0.44 A	1.56 KG
RL254 S 85 CFL	0.6 A	0.38 A	1.88 KG
RL254 S 105 CFL	0.9 A	0.44 A	1.88 KG

RL606 LOWBAY

250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH ■ 85 CFL



APPLICATIONS

WAREHOUSES
 FOUNDRIES
 FACTORIES
 WORKSHOPS
 GARAGE CANOPIES
MOUNTING HEIGHT: 4 - 5 m


- powder coated mild steel control gear housing ■ high purity aluminium reflector ■ mounting brackets
- integral control gear ■ IP23 open ■ IP43 enclosed ■ **optional glass cover available**

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL606 250 MV	2.60 A	1.35 A	7.00 KG
RL606 400 MV	4.20 A	2.10 A	8.00 KG
RL606 250 HPS	2.10 A	1.42 A	7.65 KG
RL606 400 HPS	3.80 A	2.20 A	9.55 KG
RL606 250 MH	2.80 A	1.42 A	7.65 KG
RL606 400 MH	3.80 A	2.20 A	9.55 KG
RL606 85 CFL	0.60 A	0.38 A	3.25 KG

RL808 POST TOP

80 MV ■ 125 MV ■ 70(I) HPS ■ 150 HPS ■ 70 MH ■ 150 MH



APPLICATIONS

PARKS & GARDENS
FOOT PATHS
DRIVEWAYS
PEDESTRIAN PRECINCTS
CAR PARKS

MOUNTING HEIGHT: 3 - 5 m


- external control gear
- glass reinforced polyester lid
- polycarbonate diffuser
- 76mm cast aluminium entry
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL808 80 MV	0.90 A	0.45 A	4.15 KG
RL808 125 MV	1.35 A	0.68 A	4.35 KG
RL808 70(I) HPS	0.72 A	0.45 A	4.40 KG
RL808 150 HPS	1.30 A	0.88 A	5.90 KG
RL808 70 MH	0.72 A	0.45 A	4.40 KG
RL808 150 MH	1.70 A	0.82 A	5.90 KG

RFM FLUORESCENT MOISTURE PROOF

1 x 18 W ■ 2 x 18 W ■ 1 x 36 W ■ 2 x 36 W ■ 1 x 58 W ■ 2 x 58 W



APPLICATIONS

CORRIDORS & PASSAGEWAYS
MOISTURE/CORROSIVE
ENVIRONMENT
DUSTY ENVIRONMENT
CANOPY
COLD ROOMS

MOUNTING HEIGHT: 2 - 4 m

- GRP base
- acrylic diffuser
- robust polyamide or stainless steel clips
- roto lock lampholders
- removable powder coated gear plate
- electromagnetic or electronic control gear
- IP66
- T8 or T5 lamps

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RFM 118 (1 X 18 W)	0.17 A	0.13 A	1.50 KG
RFM 218 (2 X 18 W)	0.29 A	0.22 A	2.00 KG
RFM 136 (1 X 36 W)	0.29 A	0.22 A	3.00 KG
RFM 236 (2 X 36 W)	0.58 A	0.44 A	4.00 KG
RFM 158 (1 X 58 W)	0.42 A	0.32 A	3.50 KG
RFM 258 (2 X 58 W)	0.84 A	0.64 A	5.00 KG

CDB BULKHEAD

80 MV ■ 125 MV ■ 70(I) HPS ■ 150 HPS ■ 70 MH ■ 150 MH



APPLICATIONS

TUNNELS
PERIMETER
SMALL AREAS
ARCHITECTURAL
CONVEYOR

MOUNTING HEIGHT: 2.5 - 5 m



- powder coated cast aluminium housing
- borosilicate glass diffuser
- integral control gear
- wall mounted
- stainless steel screws
- IP55
- also available in 2 x 26 W & emergency

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CDB 80 MV	0.90 A	0.45 A	5.15 KG
CDB 125 MV	1.35 A	0.68 A	5.60 KG
CDB 70(I) HPS	0.72 A	0.45 A	5.90 KG
CDB 150 HPS	1.30 A	0.88 A	6.95 KG
CDB 70 MH	0.72 A	0.45 A	5.90 KG
CDB 150 MH	1.70 A	0.82 A	6.95 KG

CIB INDUSTRIAL BULKHEAD

80 MV ■ 125 MV ■ 70(I) HPS ■ 150 HPS ■ 70 MH ■ 150 MH



APPLICATIONS

TUNNELS
CORRIDORS
BUILDING PERIMETER
CONVEYER
CANOPY

MOUNTING HEIGHT: 2.5 - 5 m


- robust powder coated cast aluminium housing
- borosilicate glass diffuser
- integral control gear
- ceiling/wall mounting
- stainless steel clips
- IP65
- also available in 250 W HPS/MH, 2 x 26 W & emergency

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
CIB 80 MV	0.90 A	0.45 A	8.70 KG
CIB 125 MV	1.35 A	0.68 A	9.00 KG
CIB 70(I) HPS	0.72 A	0.45 A	8.70 KG
CIB 150 HPS	1.30 A	0.88 A	10.00 KG
CIB 70 MH	0.72 A	0.45 A	9.00 KG
CIB 150 MH	1.70 A	0.82 A	10.50 KG

ECONO BULKHEAD

60 W BC ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN

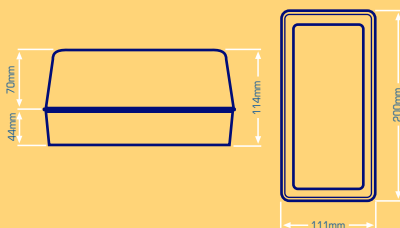

APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS


- ABS base
- polycarbonate diffuser
- integrally moulded bracket for lamp
- wall / ceiling mounted
- hinged reflector plate for easy installation
- UV stabilised for long life
- indoor or under canopy use
- IP40

ORDERING DATA

CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBECO 60 W ESBP	60 W ES INCANDESCENT		0.33 KG
MBECO 60 W BCBP	60 W BC INCANDESCENT		0.28 KG
MBECO 109 W BP	1 X 9W PL - 2 PIN	0.06 A	0.60 KG
MBECO 209 W BP	2 X 9W PL - 2 PIN	0.12 A	0.85 KG

RECTANGULAR LUMINAIRE

60/100 ES ■ 60/100 BC ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN

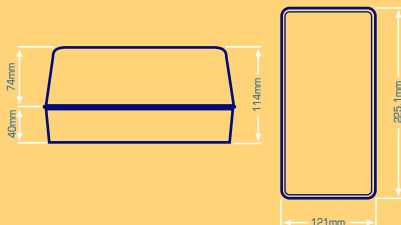

APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS


- polycarbonate base
- polycarbonate diffuser
- integral control gear
- available in ECG
- wall / ceiling mounted
- UV stabilised for long life
- available with day-night sensor
- IP65

ORDERING DATA

CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBREC 60/100 BCGP	60/100W BC INCANDESCENT		0.45 KG
MBREC 60/100 ESGP	60/100W ES INCANDESCENT		0.50 KG
MBREC 109W GP	1 X 9W PL - 2 PIN	0.06 A	0.84 KG
MBREC 209W GP	2 X 9W PL - 2 PIN	0.12 A	0.86 KG

ROUND BULKHEAD

60/100 ES ■ 60/100 BC ■ 16W 2D ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN
2 X 9W PL - 4 PIN ■ 1 X 26W PL - 2PIN



APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS


- polycarbonate base
- polycarbonate prismatic diffuser
- integral control gear
- splashproof
- wall / ceiling mounted
- ECG available
- UV stabilised for long life
- IP65

ORDERING DATA

CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBR 60/100 ESWP	60/100W ES INCANDESCENT		0.55 KG
MBR 60/100 BCWP	60/100W BC INCANDESCENT		0.60 KG
MBR 16W2D WP	16W 2D	0.10 A	1.03 KG
MBR 109W WP	1 X 9W PL - 2 PIN	0.06 A	1.04 KG
MBR 209W WP	2 X 9W PL - 2 PIN	0.12 A	1.30 KG
MBR 209W/EL WP	2 X 9W PL - 4 PIN	0.11 A	1.30 KG
MBR 126W WP	1 X 26W PL - 2 PIN	0.15 A	1.52 KG

SQUARE BULKHEAD

60/100 ES ■ 60/100 BC ■ 16W 2D ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN
2 X 9W PL - 4 PIN ■ 1 X 26W PL - 2PIN



APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS


- polycarbonate base
- polycarbonate captive diffuser
- integral control gear
- epoxy coated hinged gear tray
- IP65
- UV stabilised for long life
- photocell option
- wall / ceiling mounted
- available in emergency version

ORDERING DATA

CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBS 60/100 ESWP	60/100W ES INCANDESCENT		0.66 KG
MBS 60/100 BCWP	60/100W BC INCANDESCENT		0.71 KG
MBS 16W2D WP	16W 2D	0.10 A	1.46 KG
MBS 109W WP	1 X 9W PL - 2 PIN	0.06 A	1.10 KG
MBS 209W WP	2 X 9W PL - 2 PIN	0.12 A	1.25 KG
MBS 209W/EL WP	2 X 9W PL - 4 PIN	0.11 A	1.10 KG
MBS 126W WP	1 X 26W PL - 2 PIN	0.15 A	1.47 KG

LUNA BULKHEAD

16W 2D ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN



APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS


- polycarbonate base ■ integral control gear ■ clear or opal polycarbonate diffuser ■ wall / ceiling mounted
- polycarbonate locating ring in white, black or green ■ indoor or outdoor use ■ IP55

ORDERING DATA

CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBLUNA 16W2D WP	16W 2D	0.10 A	1.08 KG
MBLUNA 109W WP	1 X 9W PL - 2 PIN	0.06 A	1.29 KG
MBLUNA 209W/1WP	2 X 9W PL - 2 PIN	0.12 A	1.30 KG

UFO BULKHEAD

60/100 W ES/BC ■ 16W 2D ■ 1 X 9W PL - 2 PIN ■ 2 X 9W PL - 2 PIN



APPLICATIONS

CORRIDORS
ENTRANCES & EXITS
COMMERCIAL BUILDINGS
DOMESTIC
STAIRCASES
HOSPITALS & SCHOOLS

- polycarbonate base ■ integral control gear ■ clear or opal polycarbonate diffuser ■ wall / ceiling mounted
- tamper proof version ■ polycarbonate locating ring in white, black & green ■ indoor or outdoor use ■ IP55

ORDERING DATA


CODE	POLYCARBONATE BASE		WEIGHT
	LAMPS		
MBUFO 60/100 ES WP	60/100W ES INCANDESCENT		0.85 KG
MBUFO 60/100 BC WP	60/100W BC INCANDESCENT		0.82 KG
MBUFO 16W2D WP	16W 2D	0.10 A	1.14 KG
MBUFO 109W WP	1 X 9W PL - 2 PIN	0.06 A	1.14 KG
MBUFO 209W WP	2 X 9W PL - 2 PIN	0.12 A	1.41 KG

BOLLARD

GLS 60 W ■ 1 X 9W PL ■ 1 X 18W PL



- glass diffuser
- stand pipe in PVC
- rated IP55
- UV Stabilised polycarbonate anti-glare louvres
- brass nuts, stainless steel screws and rods
- black, green



APPLICATIONS

- PARKS & GARDENS
- FOOT PATHS
- WALKWAYS
- DRIVEWAYS
- PEDESTRIAN PRECINCTS
- CAR PARKS

ORDERING DATA

CODE	NYLON LAMPHOLDER		WEIGHT
	LAMPS		
BOLLARD GLS 60 W BC	GLS 60 W		2.30 KG
BOLLARD 9W PL	1 X 9W PL - 2 PIN	0.06 A	2.54 KG
BOLLARD 18W PL	1 X 18W PL - 2 PIN	0.11 A	2.54 KG

ECONO BRAAI-LITE

60 BC



- \varnothing 170mm polypropylene bowl - 6"
- nylon gallery with nylon lampholder
- epoxy - coated steel pipe which will not bend or break
 - ready for immediate use
- nylon compression gland which secures cable to spike
- 3 metres of 2 core x 1 sq.mm cabtyre cable with 16 amp 3 pin plug
- Die cast spike which can be easily driven into the ground
- Lamp not included

APPLICATIONS

- GARDENS
- ENTERTAINMENT AREAS
- CAMPING

ORDERING DATA

CODE	NYLON LAMPHOLDER		WEIGHT
	LAMPS		
E BRAAILITE 60 BC	60W BC INCANDESCENT		1.30 KG

OUTDOOR LITE

60 BC



- Ø 170mm polypropylene bowl - 6"
- nylon gallery with nylon lampholder
- epoxy - coated pipe which will not bend or break
- ready for immediate use |
- 3 metres of 2 core x 1 sq.mm cabtyre cable with 16 amp 3 pin plug
- hooks onto poles up to 30mm diameter
- Lamp not included

APPLICATIONS


GARDENS
ENTERTAINMENT AREAS
CAMPING

ORDERING DATA

CODE	NYLON LAMPHOLDER	WEIGHT
	LAMPS	
OUTDOOR LITE 60 BC	60W BC INCANDESCENT	0.80 KG

FOLDING BRAAI-LITE

60 BC

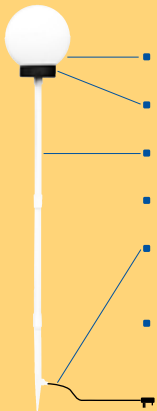

- Ø 170mm polypropylene bowl - 6"
- nylon gallery with nylon lampholder
- 1m PVC pole folds into 3 linked pieces
- ready for immediate use
- 3 metres of 2 core x 1 sq.mm cabtyre cable with 16 amp 3 pin plug
- lamp not included

APPLICATIONS

GARDENS
ENTERTAINMENT AREAS
CAMPING
BRAAI AREAS



ORDERING DATA


CODE	NYLON LAMPHOLDER	WEIGHT
	LAMPS	
F BRAAILITE 60 BC	60W BC INCANDESCENT	0.60 KG



- Ø 170mm polypropylene bowl - 6"
- nylon gallery with nylon lampholder
- epoxy coated pipe which will not bend or break
- ready for immediate use
- 3 metres of 2 core x 1 sq.mm cabtyre cable with 16 amp 3 pin plug
- lamp not included

APPLICATIONS

WORK AREAS
CAMPING



ORDERING DATA


CODE	NYLON LAMPHOLDER	WEIGHT
	LAMPS	
HANDI-LITE 60 BC	60W BC INCANDESCENT	0.70 KG

ELECTRICAL ACCESSORIES

CONICAL LAMPSHADE

Colour: White

Conical Lampshade with centre hole Ø 29,2 and 4 holes Ø 4,8 on 38 PCD



CANDLE SLEEVE



Colour: White

Candle Sleeve with tear-drop pattern




CEILING CUP**Colour:** White


Ceiling Cup for cable with lock screw

**PENDANT CUP****Colour:** WhitePendant Cup with entry hole \varnothing 13,7 and 4 holes \varnothing 5,8 on 23 PCD**MALE GROMMET****Colours:** White / Black


Male Grommet, M10 x 1 with M6 stop screw

**NYLON PENDANT CLEAT****Colour:** White


Nylon Pendant Cleat with 3 holes

**STEEL ANTI-TWIST PENDANT HANGER****CEILING ASSEMBLY****Colours:** White

Ceiling Assembly available in different lengths

**FOOT SWITCH****Colours:** White / Black

Foot Switch 2A 250 VAC



HIGH PRESSURE SODIUM

WATT	TUBULAR (lm)	ELLIPTICAL (lm)
70	5 900	5 600
150	14 500	14 000
250	27 000	25 000
400	48 000	47 000
1000	130 000	128 000

METAL HALIDE

WATT	TUBULAR (lm)	ELLIPTICAL (lm)
70	5 000	4 900
150	11 500	10 500
250	19 000	17 000
400	35 000	33 000
1000	80 000	-
2000 8.8A (380V)	200 000	-
2000 10.3A (380V)	187 000	-

MERCURY VAPOUR

WATT	ELLIPTICAL (lm)
80	3 800
125	6 200
250	12 700
400	22 000
1000	57 000

MERCURY BLENDED

WATT	ELLIPTICAL (lm)
160	3 100
250	5 600
500	14 000

COMPACT FLUORESCENT

PL 9	600
PL 13	900
PL 18	1200
PL 26	1800
13 CFL	780
45 CFL	2900
85 CFL	5100
105 CFL	6000

FLUORESCENT LAMPS

18 W STANDARD	1 200
36 W STANDARD	2 850
58 W STANDARD	4 600

Approximate Values

HIGH PRESSURE SODIUM

WATT	STARTING AMPS	RUNNING AMPS	POWER FACTOR CORRECTION CAPACITOR
70	0.72	0.45	10 µF
150	1.30	0.88	20 µF
250	2.10	1.42	30 µF
400	3.80	2.20	45 µF
1000	8.80	5.50	100 µF

METAL HALIDE

WATT	STARTING AMPS	RUNNING AMPS	POWER FACTOR CORRECTION CAPACITOR
70	0.72	0.45	10 µF
100	1.00	0.75	12 µF
150	1.70	0.82	20 µF
250	2.80	1.42	30 µF
400	3.80	2.20	45 µF
1000	9.60	5.20	90 µF
2000 8.8A (380V)	7.20	5.90	37 µF
2000 10.3A (380V)	8.20	6.80	60 µF

MERCURY VAPOUR

WATT	STARTING AMPS	RUNNING AMPS	POWER FACTOR CORRECTION CAPACITOR
80	0.90	0.45	10 µF
125	1.35	0.68	10 µF
250	2.60	1.35	15 µF
400	4.20	2.10	20 µF

COMPACT FLUORESCENTS

WATT	CORRECTED LINE CURRENT	POWER FACTOR CORRECTION CAPACITOR
1 X PL 9	0.06 A	2 µF
2 X PL 9	0.12 A	4 µF
1 X PL 13	0.08 A	2 µF
2 X PL 13	0.16 A	4 µF
1 X PL 18	0.11 A	2 µF
2 X PL 18	0.22 A	4 µF
1 X PL 26	0.15 A	3 µF
2 X PL 26	0.30 A	6 µF
1 X 16W 2D	0.10 A	2 µF
1 X 28W 2D	0.16 A	3 µF

FLUORESCENTS

WATT	STARTING AMPS	RUNNING AMPS	POWER FACTOR CORRECTION CAPACITOR
1 x 18	0.17	0.13	4 µF
2 x 18	0.29	0.22	4 µF
1 x 36	0.29	0.22	4 µF
2 x 36	0.58	0.44	8 µF
1 x 58	0.42	0.32	6 µF
2 x 58	0.84	0.64	12 µF

Approximate Values



REEFLITE



www.reeflite.com